

swing Lily of the Valley



Age indi-
cation



Speed



Senses

Scope of delivery

1x swing frame: softwood
1x swing beam with cover: galvanised steel, high-pressure laminate (HPL)
1x swing seat for toddler: rubber
post shoes: galvanised steel



swing Lily of the Valley



Technical data

	Material	SW pi
	Minimum space	6,75x4,80x2,00 m
	Impact protection net	12,0 m ²
	Free falling height	93 cm
	Ground constitution GE/NL/B	at least lawn
	Ground constitution all except GE/NL/B	at least lawn
	Largest section	Ø 14x170 cm
	Heaviest section	17 kg
	mx. number of users	1
	Tested according to standard	-
	Service interval (in months)	3

Installation information

	Foundations	4x CF or 4x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/1 h
	PF Accessories	4x 5632540
	PF drainage	-
	PF concrete	-
	PF excavation	0,38 m ³
	CF Accessories	4x 5631120
	CF drainage	-
	CF concrete	0,19 m ³
	CF excavation	0,45 m ³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height




Gesellschaft
für Klimaschutz
München



5 59 833 5

swing Lily of the Valley

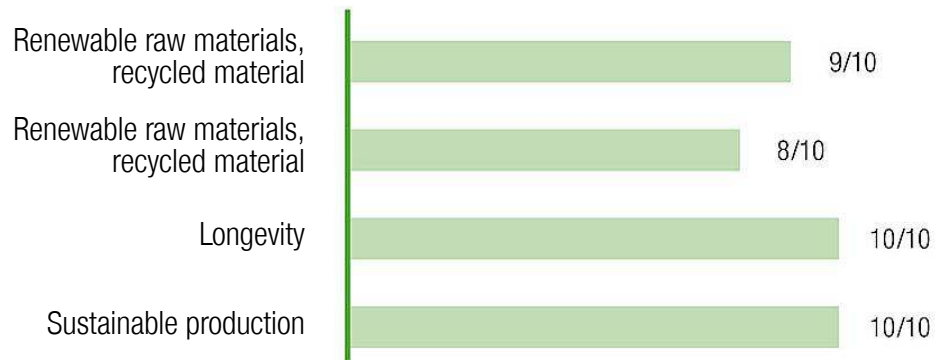

CO₂ emissions of the product

211,6 kg


**Material share of
renewable raw materials**

47%

Recyclate content

26%

Circularity score



Weighted emission factor
of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024